




AN INVESTMENT IN FIREARM SAFETY

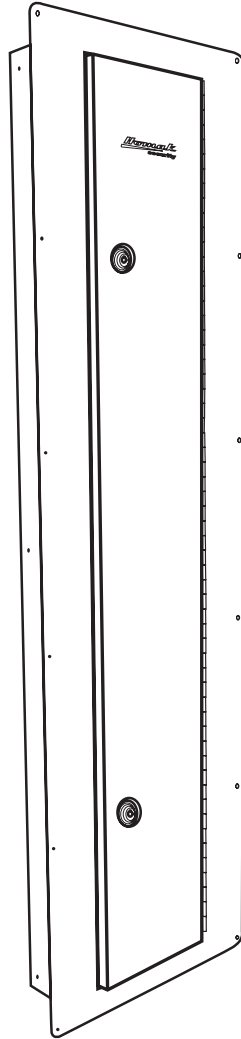

# OWNER'S MANUAL & Operating Instructions

## Between the Studs Long Gun Wall Safe

**CAUTION:**

Read all Instructions and Safety tips before using this product.  
Lisez toutes les instructions et la sûreté incline avant d'employer ce produit.  
Lea todas las instrucciones y la seguridad inclina antes de usar este producto.

Thank you for purchasing a product of Homak Security.

Visit us on the web at **www.homak.com** and check out the other quality products we offer.

### FEATURES:

- All steel construction
- Thick powder coating finish to prevent metal corrosion
- Double strength edge on top door area to prevent pry bar entry
- "Piano" type hinges on full length of doors
- Quiet operation of door
- Installs easily into the wall for maximum security.
- 4-point Locking Mechanism
- HMC high-security tubular locking mechanisms

### SAFETY PRECAUTIONS:

1. Keep from leaving a firearm loaded when securing it in this cabinet. Some types of weapons may discharge easily, and even though this cabinet is an all metal construction, a bullet may penetrate the steel wall.
2. Check and remove firearms contained in this cabinet before returning it to Homak or a Retail store. If the cabinet will not open, a certified locksmith may be able to open the cabinet with safe techniques.
3. Do not place this cabinet near excessive heat. This cabinet does not carry a fire rating.
4. If you misplace your keys, or need to purchase a replacement lock cylinder, contact Homak with the information listed below. Please have your key number ready. This number is located on some keys and is also stamped into the front of each lock cylinder.

Homak Manufacturing  
1605 Old Route 18  
Wampum, PA 16157

1-800-874-6625  
www.homak.com


## MECHANICAL ASSEMBLY:

Inside the wall safe door you will find the following items:

- Wall mounting kit (24 bolts, 24 washers)
- Lock Key set
- Foam liner (ALREADY INSTALLED)

### Install the Cabinet

1. Make sure your wall safe is unlocked and open. Locate the 24 washers and screws. Place the cabinet in a suitable location.

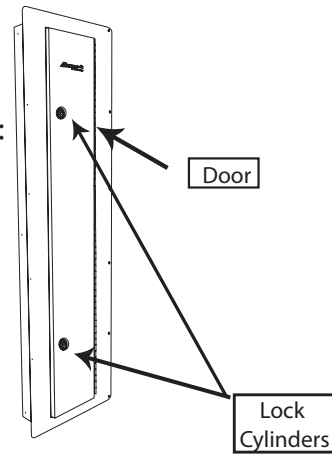


NOTE: This cabinet is not designed to be used without securing it to a wall or other surface. IT MAY TIP OVER!

2. After finding a suitable location for your wall safe, fit the wall safe into wall opening. Opening will be approximately 14.25 inches wide x 57.25 inches high and centered between your two wall studs.


3. Using the hardware provided with your unit, screw one washer and bolt through the foam liner and into the screw holes provided on the inside of the wall safe into a wall stud. (The cabinet screw holes are 11.5 inches apart on the front of the wall safe and 27.5 inches apart of the sides of the wall safe.) SEE DIAGRAM A After screwing in the 12 bolts and 12 washers, the wall safe should be securely mounted to the wall studs.

4. Use remaining washers and bolts to secure the front of the wall safe on the front frame. SEE DIAGRAM B

### DIAGRAM A

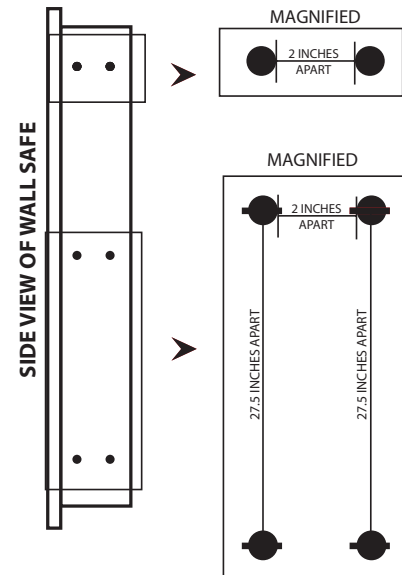

APPLIES TO ALL HOLES ON BOTH SIDES OF WALL SAFE

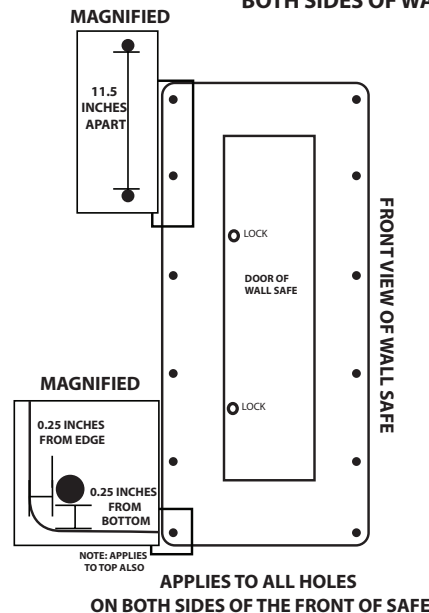

APPLIES TO ALL HOLES ON BOTH SIDES OF THE FRONT OF SAFE

### Foam Components

The foam components have already been installed into your wall safe. This material is installed with adhesive backing.

## PRODUCT REGISTRATION

Thank you for purchasing this quality HOMAK product. Please take the time to register your key and product by calling 1-800-874-6625 or by visiting [www.homak.com](http://www.homak.com) and clicking the "Product Registration" link.

This will allow us to better assist you in the future for:

- Replacement keys
- Parts
- Warranty claims
- Other product concerns

THIS PRODUCT CARRIES A LIMITED ONE (1) YEAR  
WARRANTY FOR PARTS AND LABOR  
**PLEASE CALL 1-800-874-6625 OR VISIT [WWW.HOMAK.COM](http://WWW.HOMAK.COM)  
FOR WARRANTY OR PART REPLACEMENT QUESTIONS.**

***Homak***  
**security**

Homak Manufacturing  
1605 Old Route 18  
Wampum, PA 16157

1-800-874-6625  
[www.homak.com](http://www.homak.com)  
PRODUCT MADE IN CHINA